

DESCH Mini

Torsionally rigid couplings



WV 11 - GB

Shaft connector type DESCH Mini-clutch

Features

The DESCH Mini-coupling is a float-free, torsion proof, bending elastic and, above all, maintenance free steel coupling made in one piece. It is ideally suited for drive systems that control and manage highly dynamical processes in confined spaces. This situation can be found in the whole machine construction sector. Transfer lines, robots, medical technology and model making also count among the fields of application.

The slot structure design results in positive cushioning effects and accounts for the desired vibrancy stability, but these are only some of the advantages of the DESCH Mini-coupling. Another of its strengths is a very good axial, radial and angular flexibility when adjusting misalignments with low reset forces.


The DESCH Mini-coupling is easy to install – there are mounting possibilities on the shafts via clamping hubs or removable clamping hubs. Furthermore, a variety of hub designs is available, taking into account all sorts of applications and mounting situations.

The DESCH Mini-coupling is made of high quality aluminium (AL), stainless steel (VA) or machining steel (St). It is unreservedly suitable for operations at temperatures ranging from -55°C to +150°C.

A deployment at higher temperatures is possible after clearance with our technical department.



Type MWK

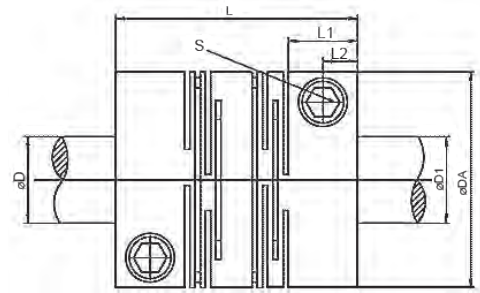


Dimensions in mm							
Size	L	L1	L2	D	D1	DA	S DIN 912
16	23	7	3,5	3-6	3-6	16	M2,5x6
18	16,6	5,5	2,75	3-6	3-6	18	M2,5x8
20	28	8	4	3-8	3-8	20	M2,5x8
22	20	5,5	2,75	3-10	3-10	22	M2,5x8
25	28	8	4	6-12	6-12	25	M3x10
30	40	11	5,5	6-14	6-14	30	M4x10
40	48	11	5,5	6-19	6-19	40	M5x14
50	65	19	9,5	10-26	10-26	50	M6x16
60	80	25	12,5	10-30	10-30	60	M8x18
70	95	25	12,5	15-35	15-35	70	M8x25
80	100	25	12,5	20-40	20-40	80	M8x25

Size	Technical data												
	Torque T_{KN} Nm			Rotational speed rpm	Misalignment ²⁾			Torsional Stiffness 10^3 Nm/Rad			Weight ³⁾ g		
	AI ¹⁾	VA ¹⁾	St ¹⁾		Winkel °	Axial mm	Radial mm	AI ¹⁾	VA ¹⁾	St ¹⁾	AI ¹⁾	VA ¹⁾	St ¹⁾
16	3	-	-	10000	1	±0,3	±0,2	0,3	-	-	10	28	-
18	3	6	-	10000	1	±0,3	±0,2	0,4	0,7	-	5	18	-
20	5	12	-	9500	1	±0,3	±0,2	0,5	0,8	-	15	45	-
22	3	6	-	9500	1	±0,3	±0,2	0,6	0,9	-	12	40	-
25	7	16	-	8000	1	±0,3	±0,2	3,5	5	-	25	75	-
30	10	25	-	6000	1	±0,4	±0,3	5	8,5	-	50	160	-
40	19	36	-	5000	1	±0,4	±0,3	11,5	20	-	115	340	-
50	35	73	-	5000	1	±0,5	±0,3	35	55	-	250	650	-
60	70	-	125	4500	1	±0,5	±0,3	70	-	95	500	-	1350
70	130	-	170	4000	1	±0,5	±0,3	95	-	120	750	-	1890
80	180	-	220	3500	1	±0,5	±0,3	100	-	135	1040	-	3080

> 1) to 3) for explanation see page 4

Type MWH

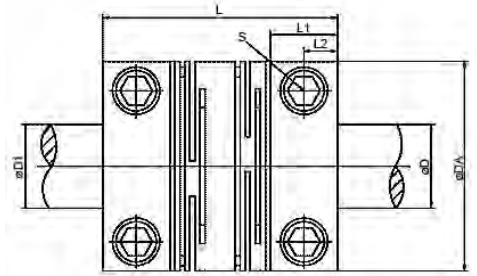

Dimensions in mm							
Size	L	L1	L2	D	D1	DA	S DIN 912
30	40	11	5,5	6-14	6-14	30	M 4x10
40	48	11	5,5	6-19	6-19	40	M 5x14
50	65	19	9,5	10-26	10-26	50	M 6x16
60	80	25	12,5	10-30	10-30	60	M 8x18
70	95	25	12,5	15-35	15-35	70	M 8x25
80	100	25	12,5	20-40	20-40	80	M 8x25

Technical data													
Size	Torque T_{m} (Nm)			Rot. Speed [rpm]	Misalignment ²⁾			Torsional stiffness 10^3 (Nm/Rad)			Weight ³⁾ [g]		
	Al ¹⁾	VA ¹⁾	St ¹⁾		Winkel (°)	Axial (mm)	Radial (mm)	Al ¹⁾	VA ¹⁾	St ¹⁾	Al ¹⁾	VA ¹⁾	St ¹⁾
30	10	25	-	6000	1	±0,4	±0,3	5	8,5	-	50	160	-
40	19	36	-	5000	1	±0,4	±0,3	11,5	20	-	115	340	-
50	35	73	-	5000	1	±0,5	±0,3	35	55	-	250	650	-
60	70	-	125	4500	1	±0,5	±0,3	70	-	95	500	-	1350
70	130	-	170	4000	1	±0,5	±0,3	95	-	120	750	-	1890
80	180	-	220	3500	1	±0,5	±0,3	100	-	135	1040	-	3080


- > 1) Material: aluminium alloy (Al) or stainless steel (VA) as of size 60: machining steel (St)
- 2) The maximum permissible parameters are as stated above and they may only appear individually.
If multiple misalignments occur, a reduction has to be made. (see page 6)
- 3) concerns unbored couplings

Bore with groove according to DIN 6885 possible on demand!

Special types


- > This coupling system is available with many various hub versions, since it is used in various coupling applications with very different installation circumstances. The difference among the versions is only the form. The characteristics of couplings, like torque transmission capacity, compensation of the shaft misalignment and suchlike, are of course guaranteed.

Design for threaded shaft
Type MWM




- Control systems
- Positioning systems
- Rotating tables, agitatorsystems
- Medical equipment

Design with hollow shaft
Type MWT




- Shaft encoder
- Gearing with hollow shafts

Design with hollow shaft (isolating)
Type MWTI




- Shaft encoder
- Solar power stations

Design for flatted shafts (D-Shafts)
Type MWD




- Torsional transmitters and engines with D-shaft
- Incremental transmitter
- Positioning systems

Design with spreader shaft
Type MWS




- Connections with planet gear, shaft encoder
- Connection with hollow shaft
- Tunnel mounting

Design with threaded end
Type MWZ




- Jig manufacturing
- Grinding machine
- Conveyors systems
- Small grinding and boring machines


Allowable misalignments



Axial misalignment



Radial misalignment



Angular misalignment

- > Reduction of the allowable values of misalignment when the combination of misalignments occur or at other

rotational speeds:
$$\frac{\Delta W_r}{\Delta K_r} + \frac{\Delta W_a}{\Delta K_a} + \frac{\Delta W_w}{\Delta K_w} \leq 1$$

$\Delta K_{r/a/w}$ = allowable radial, axial or angular misalignment of the shafts resp. of the coupling halves

$\Delta W_{r/a/w}$ = measured radial, axial or angular misalignment of the shafts esp. of the coupling halves

Selection

- > The torque of the machine T_{AN} is determined by:

$$T_{AN} \text{ [Nm]} = 9550 \times \frac{P_{\text{Motor}} \text{ [kW]}}{n \text{ [rpm]}}$$

This torque T_{AN} multiplied by a safety factor „S“ depending on the application and gives the required nominal coupling torque T_{KN} .

Result: $T_{KN} \geq S \times T_{AN}$

Operating faktor S_b	
Uniform load	1
Irregular load	1,5
Heavy shock	2

- > In case that bigger shock or changing load occur we recommend a revision according to DIN 740. An adequate calculation program is available. For such a revision the following information is required:

1. Kind of the driving machine
2. Kind of the driven machine
3. Power of driving and driven machines
4. Rotational speed of operation
5. Shock loads
6. Exciting loads
7. Moments of inertia of load- and driving sides
8. Starts per hour
9. Ambient temperature

DESCH DPC Couplings			
	<p>Habix® Couplings Type HWN, Type HWT with Taper-bush</p>		<p>Orpex® Couplings</p>
	<p>Hadeflex® Couplings Type X and TX</p>		<p>Clamp Couplings DIN 115 Flange Couplings DIN 116</p>
	<p>DESCH HRC Couplings</p>		<p>Clamp Couplings Steel / Stainless steel 1-piece / 2-piece design</p>
	<p>Hadeflex® Couplings Type F</p>		<p>Conax® Friction Clutches</p>
	<p>DESCH Flex Couplings</p>		<p>Planox® Friction Clutches</p>

Catalogues available on request!



DESCH Antriebstechnik GmbH & Co. KG

Postbox 14 40 | 59753 Arnsberg/Germany
Kleinbahnstraße 21 | 59759 Arnsberg/Germany
T +49 2932 300-0 | F +49 2932 300-899
I www.desch.de | E info@desch.de

DESCH DPC GmbH & Co. KG
Postbox 14 40
59753 Arnsberg/Germany
Kleinbahnstraße 21
59759 Arnsberg/Germany
T +49 2932 300-0
F +49 2932 300-830
I www.desch.de
E info@desch.de

DESCH Canada Ltd.
240 Shearson Crescent
Cambridge, Ontario
Canada N 1T 1J6
T +1800 2631866
+1519 6214560
F +1519 6231169
I www.desch.de
E desch@desch.on.ca

DESCH Italia
Drive Technology
Ufficio di rappresentanza in Italia
Via Cavriana, 3
20134 Milano/Italy
T +3902 7391280
F +3902 7391281
I www.desch.de
E desch.italia@desch.de

DESCH China
Machinery Sales (Shanghai) Ltd.
Building Nr. 3
No. 388 Minshen Road,
Songjiang Industrial Zone
201612 Shanghai/China
T +86 21 6126-8061
F +86 21 57655155
I www.desch.de
E desch.china@desch.de