




Long life V-Belt especially for reverse-bend drive
with backside idlers

High Performance Agricultural V-Belt W-800

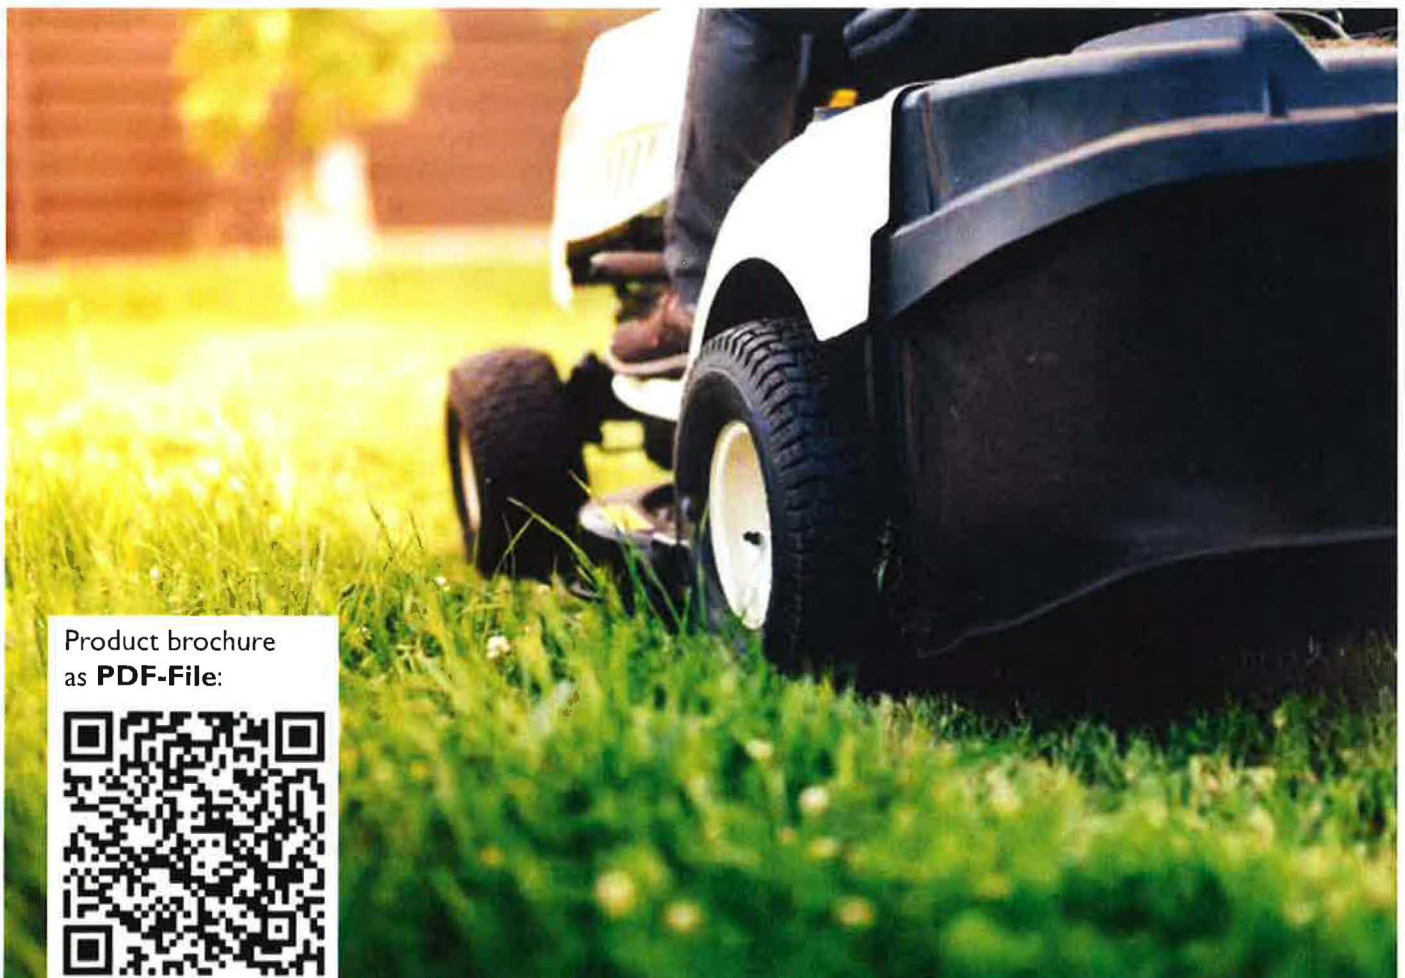

Product brochure
as **PDF-File:**




INTRODUCTION

Heat and flex resistance superior to any other V-Belt, which makes it a top-end V-Belt for agricultural machinery use.

This enables high load power transmission in harsh environments. Ideal for high load applications.



BELT STRUCTURE

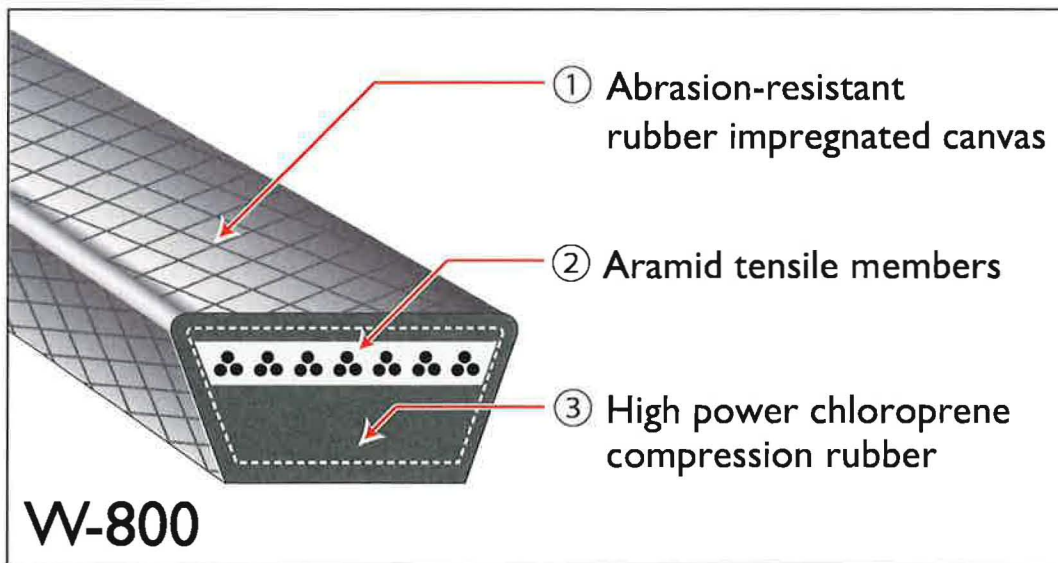



EXAMPLE




ADVANTAGES

- Long **durability** for backside bending
- High **transmission capacity**
- Long **service life** in reverse applications
- High **shock service life**

Reverse Bending Durability

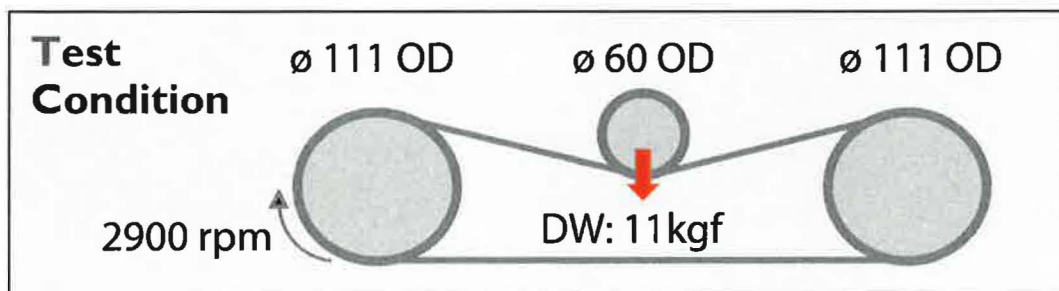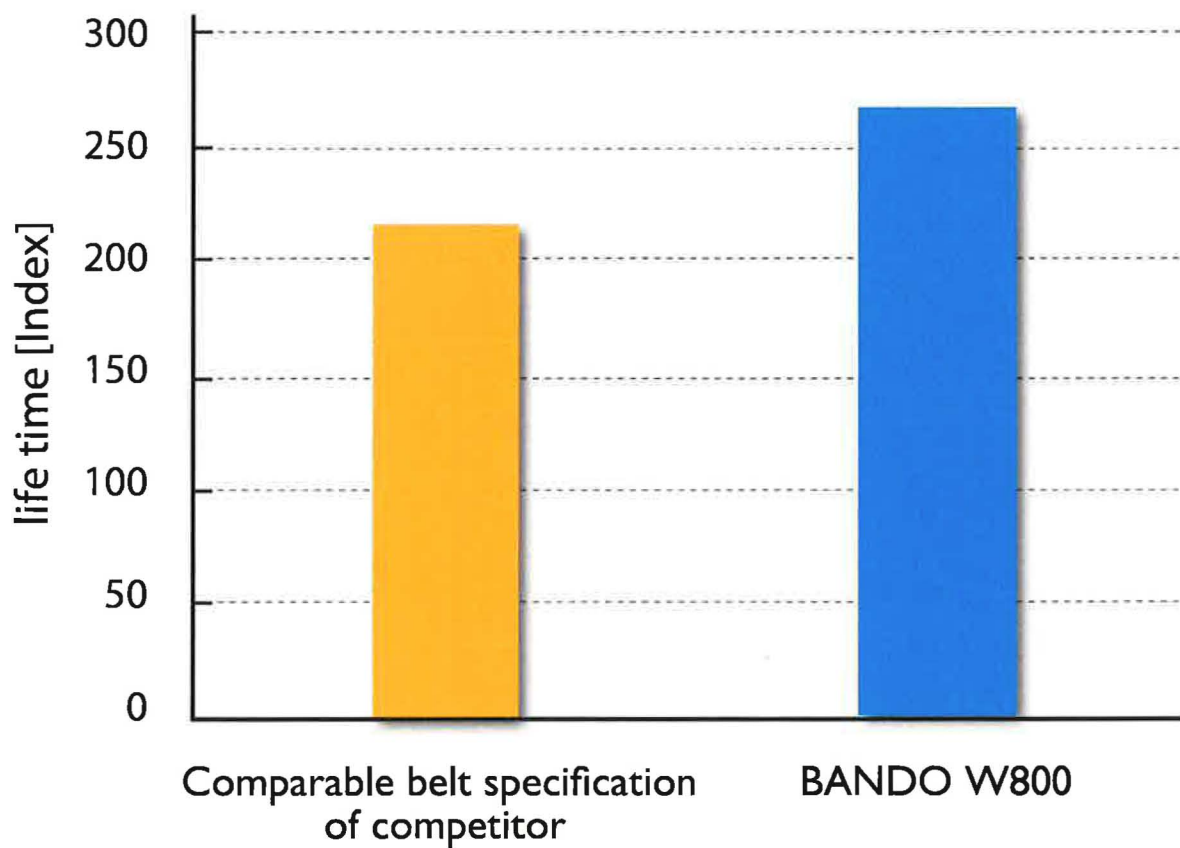

DIMENSIONS



Belt Type	Top width bt	Thickness h	Angle ab
	mm	mm	deg
SA	12.7	7.0	40°
SB	16.7	9.0	40°
SC	22.2	11.0	40°

SIZE LIST

Belt Type	axb (mm)	Belt pitch length in inches
SA	12.7 x 7.0	27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100
SB	16.7 x 9.0	23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, 102, 105, 108, 110, 112, 115, 118, 120, 122, 125, 128, 130, 132, 135, 140, 145, 150, 155, 160, 165, 170, 180, 190, 200
SC	22.2 x 11.0	40, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 62, 63, 64, 65, 66, 67, 68, 69, 70, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 85, 86, 87, 88, 89, 90, 94, 95, 96, 99, 100, 102, 105, 108, 110, 112, 115, 118, 120, 122, 125, 128, 130, 132, 135, 138, 140, 142, 145, 148, 150, 155, 160, 165, 170, 180, 190, 200

Please note that the lengths marked with * are also available as half lengths.

Further half lengths are available on request.

Provided by:

* Please note that this catalogue is reserved to changes. All data in this publication have been compiled and checked with utmost diligence, nevertheless errors and mistakes cannot be totally excluded. Do not duplicate or copy any part or contents without the permission of Bando Europe GmbH.